

3060R • 60 cm Solid Door Refrigerator • Modular 3000 Series

FEATURES & BENEFITS



INTEGRATED SOLID



STAINLESS SOLID

| | |
|--------------------------|---|
| PERFORMANCE | <ul style="list-style-type: none"> • Volume of 139 litres holds up to 100 bottles (330 ml) or 141 cans (330 ml) • Temperature range: 1°C - 21°C • Convection cooling system rapidly and efficiently takes items to the set temperature • U-Select® Control offers five distinct modes: Drinks: 1°C-18°C, Deli: 1°C-4°C, Fresh: 1°C-4°C, Pantry: 1°C-21°C, Root Cellar: 7°C-13°C • U-Select® Control with digital OLED display is conveniently located on upper face of unit • Maintains temperature to within 0,5°C of the set point to maximize preservation |
| INTERIOR/EXTERIOR | <ul style="list-style-type: none"> • Black interior is illuminated with LED theatre lighting • Three full-extension, slide-out drawers are removable for easy cleaning • The middle bin has two possible positions and comes with a removable glass shelf to keep products stable • The lower bin is large enough to up to 4 one-litre containers with additional space for more storage • Door swing is field reversible. Unit is shipped with door installed right-hand hinged |
| INTEGRATION | <ul style="list-style-type: none"> • To achieve a stainless steel finish, a Euro Style panel accessory must be ordered and installed on an integrated model. Euro Style Panel Accessory must be installed on corresponding unit type (Frame/Solid) • Robust, concealed and covered hinges with built-in door stop and closer • Adjustable grille/fascia can be shifted front-to-back and up-and-down • Grille/fascia can accept a custom integrated plinthe • Integrated model requires 20 mm custom panel of your choice, or can accept U-Line Euro Style Stainless Steel Panel Accessory (must be ordered separately) • Four independently adjustable leveling legs; rear legs are adjustable from the front for ease of installation |

MODEL DETAILS

| Model | Voltage/Hz | Door Swing | Finish | Shipping Weight |
|-----------------------------|--------------|------------------|------------------|-----------------|
| U-3060RINT-00B | 220-240 / 50 | Field Reversible | Integrated Solid | 69 kg |
| U-3060RINT-00B and U-ESP60S | 220-240 / 50 | Field Reversible | Stainless Solid* | 74 kg |

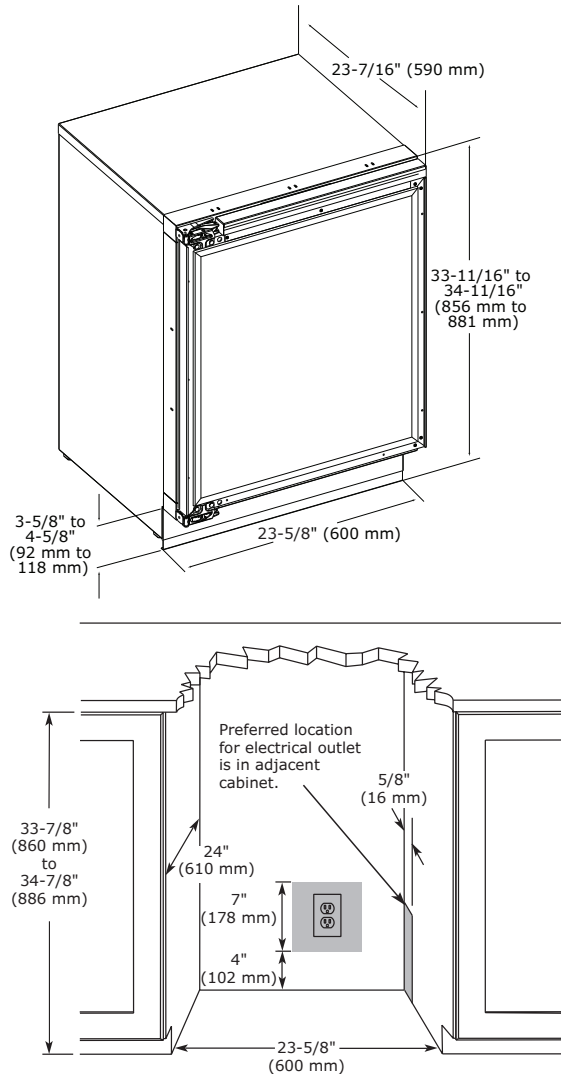
ACCESSORIES

| Model | Description | Finish | Shipping Weight |
|-------------|---|-----------------|-----------------|
| U-ESP60S | Euro Style Panel Solid 60 cm | Stainless Solid | 5 kg |
| 80-33027-01 | 60 cm Slide and Divide Bin Organizer, 3000 Series | na | 1 kg |

*To achieve a stainless steel finish, a Euro Style panel accessory must be ordered and installed on an integrated model. Euro Style Panel Accessory must be installed on corresponding unit type (Frame/Solid).

Modular 3000 Series • 60 cm Solid Door Refrigerator • **3060R**
NICHE / RECESS

Dimensions shown apply to Integrated (INT) models with a 20 mm integrated panel/frame installed (applies to U-Line's Euro Stainless Steel Panel Accessory).


PRODUCT FICHE


| | |
|--|--------------------------|
| Model | 3060R |
| Category | 3 |
| Energy efficiency class on a scale of A+++ to G | A+ |
| Energy consumption in kWh per year | 117 kWh |
| Total volume: fridge compartment (net) | 136 L |
| Total volume: wine compartment (net) | N/A |
| Total volume: freezer compartment (net) | N/A |
| Frost-free compartment | Yes |
| Temperature rise time in event of blackout (hrs) | N/A |
| Climate class | ST |
| Noise emissions | 46 dBA |
| Dimensions: width | 600 mm |
| Dimensions: depth | 590 mm |
| Dimensions: height | 856 mm |
| Net weight: solid door | 64 kg |
| Net weight: glass door | N/A |
| Panel type | Solid Panel (-00 Suffix) |
| Panel thickness | 20 mm |
| Panel height | 762 mm |
| Panel width | 594 mm |
| Rated frequency | 50 Hz |
| Rated voltage | 220-240 v |
| Refrigerant charge | 45 g |
| Foam blowing agent | HFO-1233zd |
| Marine capable | Yes* |

INSTALLATION NOTES

No additional clearance around sides, top or rear of unit is needed for ventilation.

Do not obstruct front grille/fascia air flow.

For cabinet depths less than 620 mm, electrical socket must be located in the adjacent cabinet or recess in the wall. The power cord length is 180 cm.

COOLING SYSTEM


*Must be installed in a climate controlled environment and operate within the temperatures designated in U-Line's Limited Warranty.

Please visit U-Line.com to view this model's User Guide. All specifications are subject to change without notice.